



Wall-Mounted Foam Unit

This wall-mounted foaming unit uses compressed air to provide consistent dilution rates. Draws from concentrate. Comes with an assortment of metering tips to provide the desired PPM.




Key Features

- Powered by compressed air
- Draws from concentrated product
- Dilutes at ratios of 14:1 to 320:1*
- Output distance: 25-30 ft. (7-9 m)
- Output volume: 20-45 gal/min (75-170 l/min) of foam
- Flow rate: 2 gal/min (7.6 l/min)*
- Stainless steel ball valve and wand
- Stainless steel fluid fittings
- Quick-change pump
- Santoprene pump seals standard

*Dilution rates and flow rates given are based on chemical with viscosity of water and factory air pressure settings.




MD20016



Compressed air requirements:	40-80 psi (3-5 bar) with 5-10 cfm (141-283 l/min)
Water requirements:	10-100 psi (0.69-6.9 bar)
Backflow prevention is required:	Consult local plumbing ordinances for more information
Liquid temperature range:	40-100°F (4.4-37°C)
Chemical compatibility:	Chemical products used with this equipment must be formulated for this type of application and compatible with unit materials and pump seals. For more information on chemical compatibility, consult the manufacturer or SDS for your product or contact our customer service department.

Distributed By:

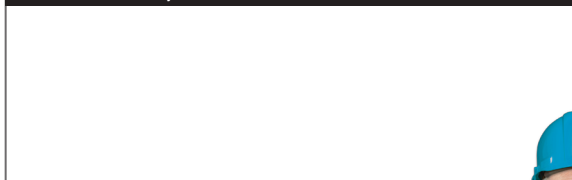

Complete, Confident, Compliant.

www.bestsanitizers.com | 888.225.3267