




Wall-Mounted Foam/Sanitize Unit


Save space with two systems in one enclosure. This wall-mounted foam/sanitize unit has separate systems contained in the same housing which allows you to use the foam and sanitizing functions separately or at the same time, without the risk of cross-contamination between products.

Key Features

- Unit includes separate foam and sanitize systems built inside a shared enclosure
- Use foam and spray function independently or simultaneously
- Draws from concentrate products - control dilution ratios independently for each function
- Separate hoses make it easy to switch between functions or use both functions simultaneously in different areas
- Foam system dilutes product at ratios of 14:1 to 320:1
- Spray system dilutes product at ratios of 15:1 to 512:1
- Regulates incoming water pressure to ensure consistent dilution and foam quality
- No shared wetted components
- No cross-contamination between products
- Requires separate water, compressed air, and chemical supply for each function
- Santoprene pump seals standard

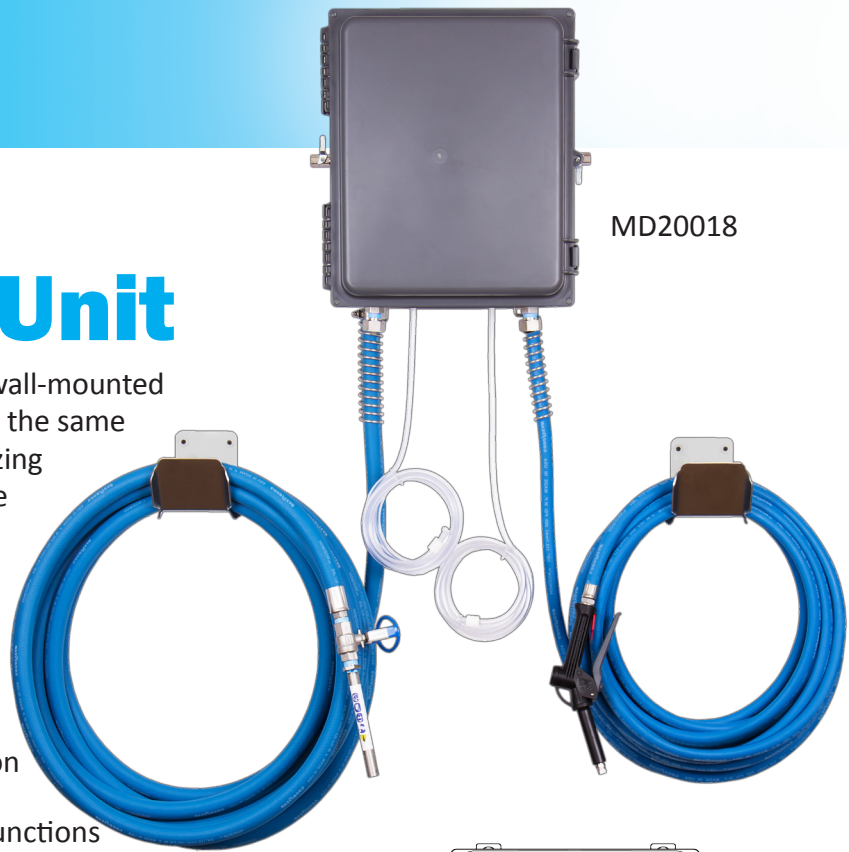

MD20018



Compressed air requirements:	FOAM SYSTEM: 40-80 psi (3-5 bar) with 5-10 cfm (141.6-283.3 l/min) SPRAY SYSTEM: 40-80 psi (3-5 bar) with 2 cfm (56.6 l/min)
Water requirements:	10-100 psi (0.69-6.9 bar)
Backflow prevention is required:	Consult local plumbing ordinances for more information
Liquid temperature range:	40-100°F (4.4-37°C)
Chemical compatibility:	Chemical products used with this equipment must be formulated for this type of application and compatible with unit materials and pump seals. For more information on chemical compatibility, consult the manufacturer or SDS for your product or contact our customer service department.

Distributed By:



Complete, Confident, Compliant.

www.bestsanitizers.com | 888.225.3267